

E6 Ultra-thin Invisible Digital Signage

SIZE:43"/55"



Product Highlights


- Slim and simple appearance design
- Realistic ultra-high-definition images
- 0 distance from the wall
- Intelligent light-sensing adjustment
- One-piece molding process + PC+ABS V0 fire-retardant material

Slim and simple design



The visual effect is clear in both horizontal and vertical modes.

The screen has four equal sides of 11.5mm, evenly distributed. The four side bezels of the display also have the same thickness and size. This new uniform bezel design prevents visual problems when the display is adjusted to portrait mode.

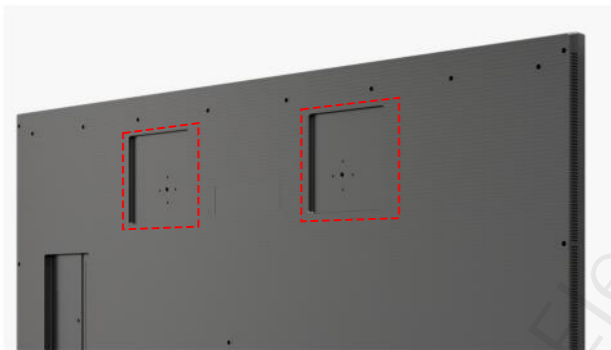


Integrated stealth solution

Embedded concealed wall-mounted design




28.5mm ultra-thin thickness

The stylish and simple design does not take up too much space.

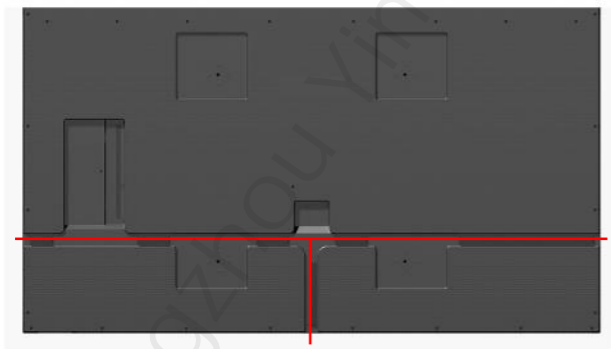

Concealed T-shaped cable tray

Supports three-way cabling (left/right/top), completely eliminating messy cables.

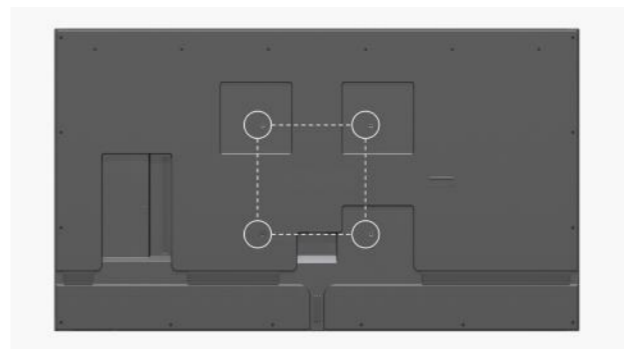

VESA* holes are centered& securely installed.

The VESA holes are moved to the center, making the load distribution more even, facilitating safe vertical screen installation and maintaining stability.

Anti-glare panel



Say goodbye to reflection problems and eliminate reflected light interference at a physical level, laying the foundation for clear display.

Intelligent light-sensing adjustment



Adaptive brightness adjustment; effortless control over brightness and energy saving.

One-piece molding process+ V0 fire-retardant material




Safe and durable, environmentally friendly. Meets UL94-V0 fire resistance standards, effectively reducing the risk of fire in public places.

0 distance from the wall



Innovative zero-distance wall mounting, seamless and aesthetically pleasing, completely solving the problem of dust accumulation and saving you visual space.

Built-in high-quality ultra-thin speakers

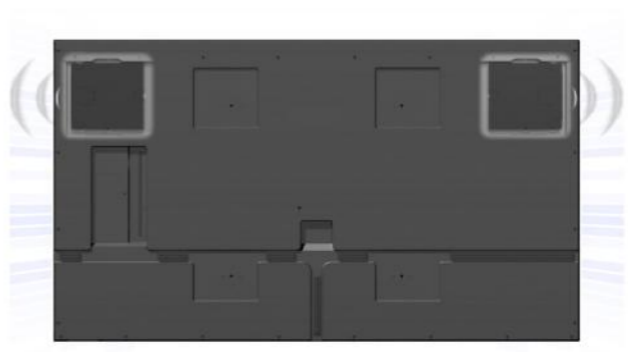

6Ω 10W external speaker delivers immersive stereo sound. The concealed speaker enclosure creates an immersive sound field.

E6 Ultra-thin Invisible Digital Signage Specifications

Model		43E6	55E6
Display panel	Diagonal dimensions	43"	55"
	Backlight type	ELED	
	Resolution	3840×2160(16:9)	
	Brightness	500cd/m²	
	Direction	Horizontal / Vertical	
	Contrast	1200:1	
	Actual display area	940.89×529.25mm	1029.6×680.4mm
	Number of colors	8Bit,16.7M	
	Overall lifespan	30000h	
	Viewing angle	178°/178°	
	Refresh rate	60Hz	
Board parameter values	Application processor	MTK9679,A73*4 Core + A53*4 Core/2.28GHz	
	GPU	Mali G52-MC1	
	Memory/Storage	4GB / 16GB	
	System version	Android 14.0	
	Network	Gigabit Ethernet port, dual-band Wi-Fi 6, BT5.4	
	Video format	PAL/NTSC/SECAM	
	Image decoding format	Supports JPG, BMP, and PNG formats.	
	Interface	USB 2.0 × 3 / USB 3.0 × 1 / Type-C × 1 (supports DP input) / LVDS × 1 / HDMI_IN × 3	
	Output port	Earphone × 1	
	WIFI	5G+2.4G	
	Bluetooth	Optional	
	Trumpet	Built-in left and right channels, 6Ω, 10W x 2	
Power supply	Input voltage	AC100~240V 50-60HZ	
	Standby power	≤0.5W	
	Rated power	≤125W	≤150W
Mechanical Specifications	Equipment size	969.37×559.05×28.5mm	1237.95×710.05×28.5mm
	Packaging size	1063.6×678.8×146mm	1332mm×843×146mm
	Equipment weight	10.1KG	16KG
	Including packaging weight	12.6KG	18.8KG
	VESA wall mount	400×400mm	
	Border width	11.5mm	11.5mm

Application scenarios



Art Exhibition



Corporate Lobby



Catering industry



Transportation junction